


## G8015-G series

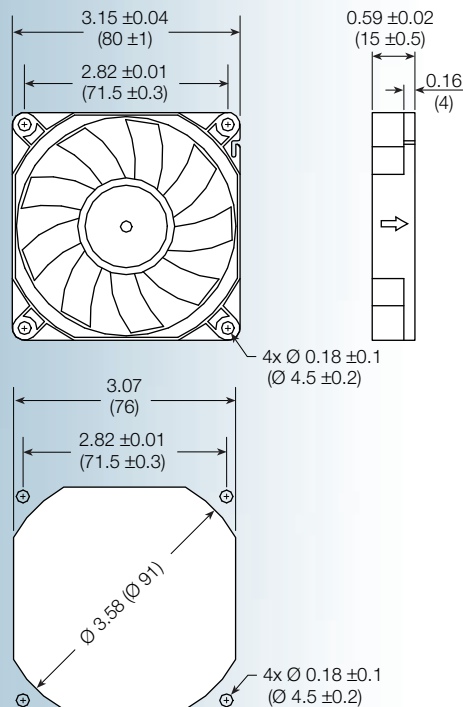

**Size: (80 x 80 x 15 mm)**  
**3.15 x 3.15 x 0.59 inches**

**Features:** *high pressure impeller design*

**Construction:** UL94V-0 PBT impeller & frame


**Bearing option:** ball bearing or sleeve

**Connection:** AWG 26, UL1007 lead wires

**Frame:** ribbed

**Protection:** thermal

**Options:** tachometer output or  
locked rotor alarm signal

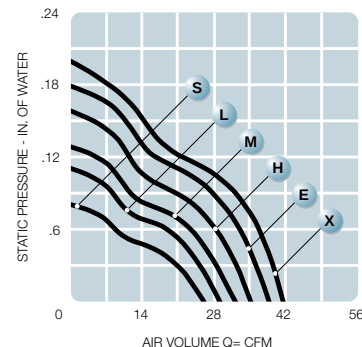

| Model No.       | Rated Voltage<br>V | Current<br>mA |     |     | Revolution<br>RPM | Air Volume          |     | Max Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dBA | Weight<br>OZ |
|-----------------|--------------------|---------------|-----|-----|-------------------|---------------------|-----|----------------------------------------|------|--------------------|--------------|
|                 |                    | 5             | 12  | 24  |                   | M <sup>3</sup> /Min | CFM | MM                                     | INCH |                    |              |
| <b>G8015S-G</b> | 5/12/24            | 200           | 100 | 80  | 2,800             | 0.73                | 26  | 2.14                                   | 0.08 | 29                 | 2.25         |
| <b>G8015L-G</b> | 5/12/24            | 280           | 130 | 90  | 3,200             | 0.82                | 29  | 2.74                                   | 0.11 | 32                 | 2.25         |
| <b>G8015M-G</b> | 5/12/24            | 380           | 180 | 120 | 3,600             | 0.92                | 32  | 3.36                                   | 0.13 | 34                 | 2.25         |
| <b>G8015H-G</b> | 12/24              | -             | 230 | 150 | 4,000             | 0.99                | 35  | 3.97                                   | 0.16 | 36                 | 2.25         |
| <b>G8015E-G</b> | 12/24              | -             | 320 | 180 | 4,400             | 1.11                | 39  | 4.69                                   | 0.18 | 38                 | 2.25         |
| <b>G8015X-G</b> | 12/24              | -             | 350 | 250 | 4,800             | 1.20                | 42  | 5.12                                   | 0.20 | 40                 | 2.25         |