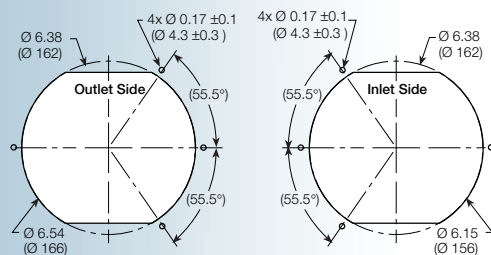
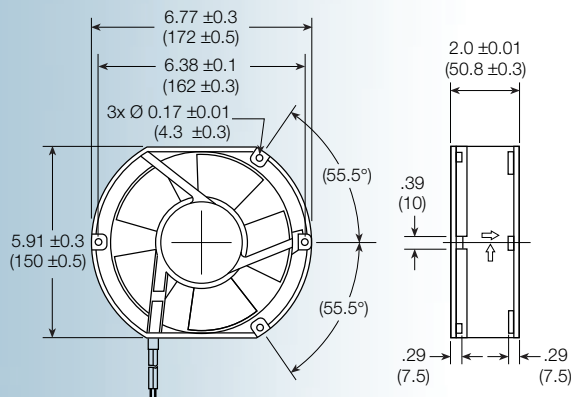


**MA1751 series**

**Size: (172 x 150 x 50.8 mm)**  
**6.77 x 5.91 x 2.0 inches**

**Features:** *All models have locked rotor protection; 24/48 models have over current and over voltage protection and soft start function*

**Construction:** Die-cast aluminum frame;  
UL94V-0 PBT impeller


**Bearing option:** ball bearing

**Connection:** AWG 22, UL1007 lead wires

**Frame:** flanged, die-cast aluminum

**Protection:** thermal

**Options:** tachometer output or locked alarm signal

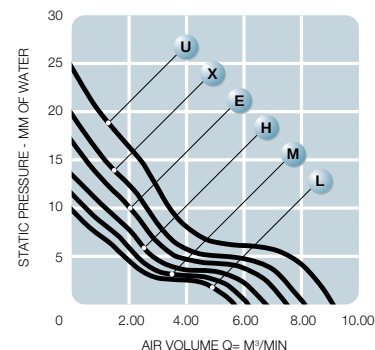

| Model No. | Rated Voltage<br>V | Current<br>A |      |      | Revolution<br>RPM | Air Volume          |       | Max Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dBA | Weight<br>g |
|-----------|--------------------|--------------|------|------|-------------------|---------------------|-------|----------------------------------------|------|--------------------|-------------|
|           |                    | 12           | 24   | 48   |                   | M <sup>3</sup> /Min | CFM   | MM                                     | INCH |                    |             |
| MA1751L   | 12/24/48           | 1.10         | 0.48 | 0.25 | 2,400             | 5.81                | 205.1 | 9.83                                   | 0.39 | 54.5               | 760         |
| MA1751M   | 12/24/48           | 1.40         | 0.57 | 0.31 | 2,600             | 6.29                | 222.2 | 11.54                                  | 0.46 | 56.6               | 760         |
| MA1751H   | 12/24/48           | 1.80         | 0.77 | 0.38 | 2,850             | 6.89                | 243.6 | 13.86                                  | 0.55 | 58.4               | 760         |
| MA1751E   | 12/24/48           | 2.20         | 0.98 | 0.55 | 3,150             | 7.62                | 269.2 | 16.93                                  | 0.67 | 61.0               | 760         |
| MA1751X   | 24/48              | -            | 1.20 | 0.73 | 3,400             | 8.23                | 290.6 | 19.73                                  | 0.78 | 63.0               | 760         |
| MA1751U   | 48                 | -            | -    | 0.90 | 3,800             | 9.20                | 324.8 | 24.64                                  | 0.98 | 66.2               | 760         |