


DC

THIN PROFILE MB3006 series

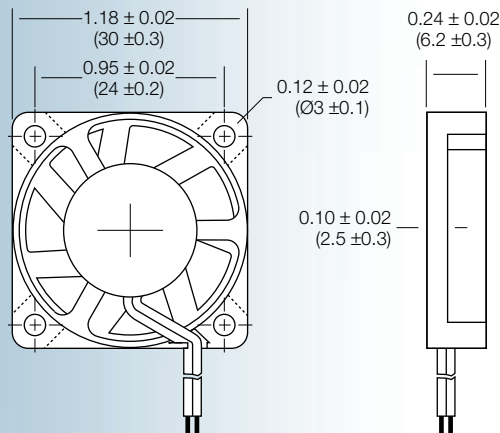

Size: (30 x 30 x 6.2 mm)

1.18 x 1.18 x 0.24 inches

1.18 x 1.18 x 0.24 inches

Construction: UL94V-0 PBT impeller & frame


Bearing option: ball bearing or sleeve

Connection: AWG 30, UL1007 lead wires

Frame: ribbed

Protection: thermal

Options: tachometer output signal

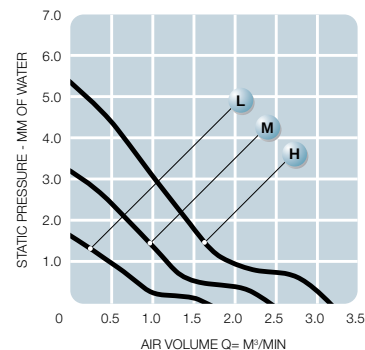

Model No.	Rated Voltage V	Operating Voltage V	Current mA	Revolution RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dBA	Weight g
					M³/Min	CFM	MM	INCH		
MB3006L	5	3 - 6.5	50	5,000	0.05	1.67	1.47	0.06	12.0	8
MB3006M	5	3 - 6.5	60	7,000	0.07	2.43	3.19	0.13	20.0	8
MB3006H	5	3 - 6.5	70	9,000	0.09	3.15	5.31	0.21	27.5	8
MB3006L	12	6-13	40	5,000	0.05	1.67	1.47	0.06	12.0	8
MB3006M	12	6-13	50	7,000	0.07	2.43	3.19	0.13	20.0	8
MB3006H	12	6-13	60	9,000	0.09	3.15	5.31	0.21	27.5	8