



DC

HIGH PERFORMANCE MC9238 series

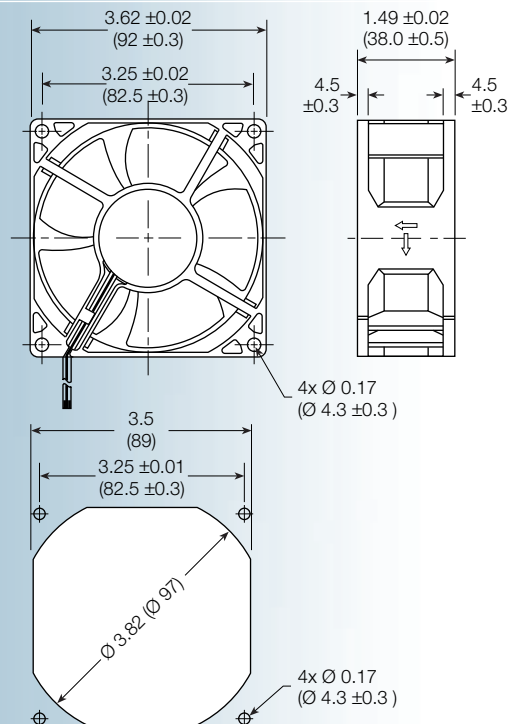

Size: (92 x 92 x 38 mm)
3.62 x 3.62 x 1.5 inches

- Features:** *high performance*
Construction: UL94V-0 PBT impeller & frame
Bearing option: ball bearing or sleeve
Connection: AWG 24, UL1007 lead wires
Frame: flanged
Protection: thermal
Options: tachometer output or locked rotor alarm signal

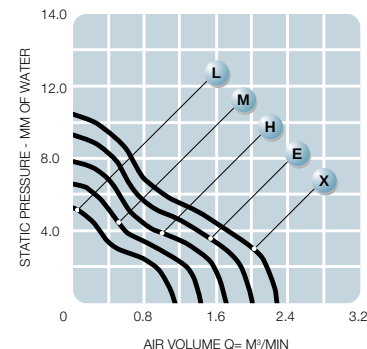

Model No.	Rated Voltage V	Operating Voltage V	Current mA	Revolution RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dBA	Weight g
					M³/Min	CFM	MM	INCH		
MC9238L	12	6 - 13.8	120	2,000	1.14	40.2	5.26	0.21	23.5	182
MC9238M	12	6 - 13.8	200	2,500	1.42	50.3	6.58	0.26	29.5	182
MC9238H	12	6 - 13.8	350	3,000	1.71	60.3	7.89	0.32	35.5	182
MC9238E	12	6 - 13.8	500	3,500	2.00	70.4	9.21	0.37	41.5	182
MC9238X	12	6 - 13.8	720	4,000	2.28	80.5	10.52	0.42	47.5	182