



DC

ULTRA-HIGH PERFORMANCE MD1238 series

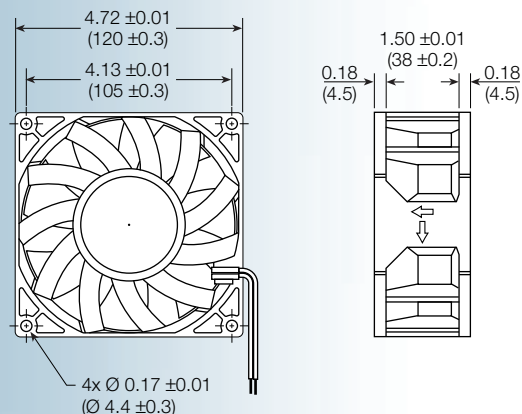

Size: (120 x 120 x 38 mm)
4.72 x 4.72 x 1.50 inches

- Features:** *High performance design*
Construction: UL94V-0 PBT impeller & frame
Bearing option: ball bearing
Connection: AWG 26, UL1007 lead wires
Frame: reinforced flanged design
Protection: thermal
Options: tachometer output or locked rotor alarm signal

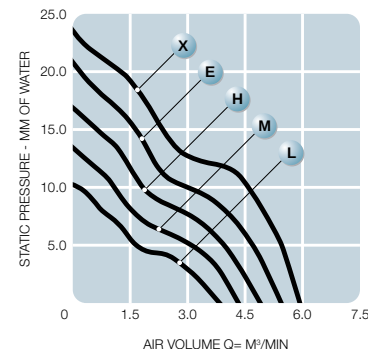

Operating temperature range: -10°C ~ 60°C

Model No.	Rated Voltage V	Operating Voltage V	Current A	Revolution RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dBA	Weight g
					M³/Min	CFM	MM	INCH		
MD1238L	12	7 - 13.2	0.85	3,000	3.90	137	10.4	0.42	52.0	411
MD1238M	12	7 - 13.2	1.20	3,400	4.42	155	13.4	0.54	54.5	411
MD1238H	12	7 - 13.2	1.60	3,800	4.92	174	16.7	0.67	57.8	411
MD1238E	12	7 - 13.2	2.10	4,200	5.43	192	20.4	0.82	59.0	411
MD1238X	12	7 - 13.2	2.50	4,500	5.82	205	23.4	0.94	62.0	411