


P/N	APPLICABLE NOTE(S)	REVISIONS			
		ZONE	REV	DESCRIPTION	DATE
CC	1,2	—	—	—	—
CCSF	1,2	—	—	—	—

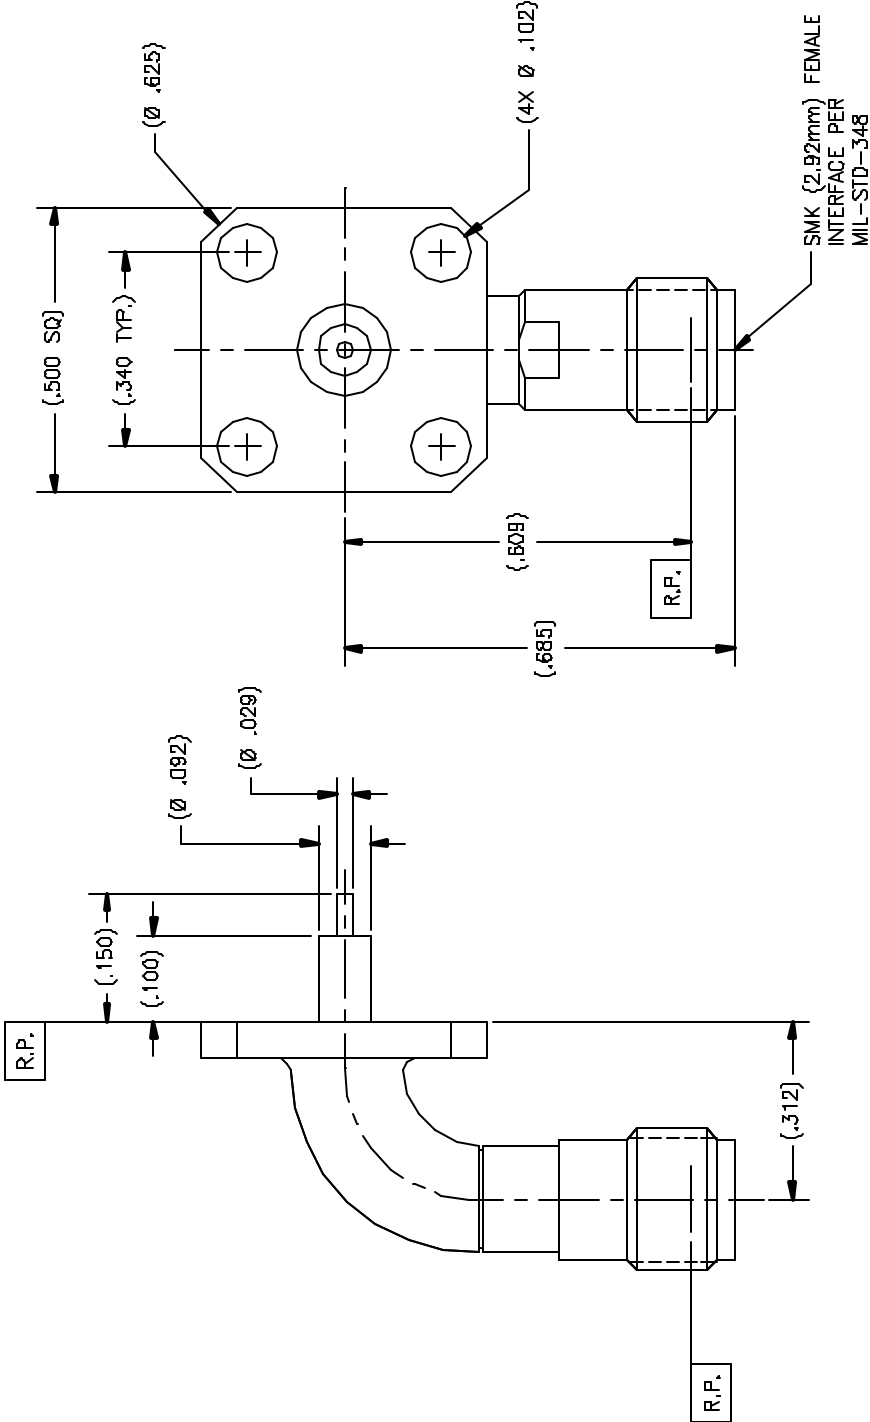

NOTES(S):

1. MATERIAL(S):
 - 1.1 BODY: 304 PER AMS 5567
 - 1.2 FLANGE: 303 SST PER ASTM A-582.
 - 1.3 CENTER CONDUCTOR: BeCu ALLOY C173 PER ASTM B-196.
 - 1.4 INSULATOR: PTFE PER ASTM D-1710.
 - 1.5 EPOXY: SIGMA VF TYPE HV.
 - 1.6 BEAD: (HIGH PERFORMANCE APPLICATION)
2. FINISH(ES):
 - 2.1 BODY & FLANGE:
(FOR CCSF's) PASSIVATED PER ASTM A-967.
(FOR CC's) GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - 2.2 CENTER CONDUCTOR: GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - 2.3 INSULATOR, BEAD & EPOXY: NONE

NOTICE
THIS DRAWING IS THE PROPERTY OF TENSOLITE. IT IS TO BE USED FOR THE MANUFACTURE OF THE PARTS SPECIFIED HEREON ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TENSOLITE. ANY VIOLATION OF THIS NOTICE WILL BE CONSIDERED A VIOLATION OF FEDERAL LAWS AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.

TOLERANCES AND NOTES EXCEPT AS NOTED		SEE NOTES		SEE NOTES	
DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/32 DECIMALS ± .005 ANGLES ± 1°		—		—	
1. MACHINE FINISH 2. DEBurr ALL SHARP EDGES AND ROUNDS 3. UNLESS OTHERWISE SPECIFIED 4. UNLESS OTHERWISE SPECIFIED 5. UNLESS OTHERWISE SPECIFIED 6. UNLESS OTHERWISE SPECIFIED 7. UNLESS OTHERWISE SPECIFIED 8. UNLESS OTHERWISE SPECIFIED 9. UNLESS OTHERWISE SPECIFIED 10. UNLESS OTHERWISE SPECIFIED		—		—	
TENSOLITE HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS 10000 Blvd. California 90015		—		—	
TITLE SMK (2.92mm) FEMALE RADIOS RIGHT ANGLE 4 HOLE FLANGE (500 SQ.) MOUNT TO STRAIGHT TERMINATION		—		—	
SCALE 1:1		—		—	
DRAWING NO. C 50990		—		—	
SHEET 1 OF 1		—		—	
DRAWING NO. 227		—		—	